

FSUO TUBE MILL WORM GEAR UNITS



ELECON 

Always a step ahead in technology

Catalogue No. : 198/G/03/10

To meet the requirement of tube mill industry and non- ferrous tube manufacturers, Elecon has developed FSUO Dual Drive type worm gear units. These gear units are also use in individual drive to punch rolls in rolling mills. The worm gear units are robust in construction and comprise of one input shaft driving two gears on parallel output shaft, one shaft moves clockwise where as other moves counter clockwise providing synchronous drive operation. The lubrication is by splashing mineral oil where as top output shaft bearings are grease packed.

RATINGS AT INPUT SPEED 1500 R.P.M.


GEAR RATIO	OUTPUT SPEED R.P.M.	CAPACITY	SIZE OF UNIT									
			3	4	5	6	7	8	9	10	12	14
5	300	INPUT POWER kW	6.4	11.3	19.0	33.0	44.0	65.0	74.2	111.0	177.0	247.0
		OUTPUT TORQUE Nm	185.4	336.1	574.5	1008.5	1317.1	1965.7	2242.1	3339.0	4953.5	7406.1
7.5	200	INPUT POWER kW	5.5	8.0	15.0	22.0	34.6	52.2	57.1	83.0	115.2	166
		OUTPUT TORQUE Nm	235.8	355.3	675.8	987.5	1548.0	2342.7	2639.9	3725.4	5129.6	7469.6
10	150	INPUT POWER kW	4.6	7.0	13.2	19.2	26.5	41.4	67.1	58.5	99.5	146.2
		OUTPUT TORQUE Nm	260.6	414.5	773.2	1155.2	1561.8	2477.7	4055.4	3426.6	5901.3	8671.9
15	100	INPUT POWER kW	3.3	6.0	10.0	17.2	24.0	36.0	50.4	52.2	73.0	135.0
		OUTPUT TORQUE Nm	277.7	487.0	821.7	1461.9	2064.0	3163.0	4524.3	4486.6	6427.5	12014.5
20	75	INPUT POWER kW	3.0	5.0	9.2	13.0	20.6	28.1	43.2	49.5	67.5	111.0
		OUTPUT TORQUE Nm	323.4	535.1	964.2	1469.4	2251.2	3246.5	4902.6	5673.0	7757.1	12894.3
25	60	INPUT POWER kW	2.5	4.0	7.2	10.4	16.0	25.2	38.0	40.5	61.0	99.0
		OUTPUT TORQUE Nm	328.9	547.5	974.6	1448.4	2164.8	3409.4	5484.2	5672.7	8477.0	13225.9
30	50	INPUT POWER kW	2.2	3.6	6.0	10.0	13.6	21.0	36.0	36.0	50.4	83.0
		OUTPUT TORQUE Nm	344.6	598.2	974.1	1623.5	2208.0	3449.5	6188.4	5844.6	8405.2	13218.8
40	37.5	INPUT POWER kW	2.0	3.0	5.0	8.3	12.0	18.0	29.0	31.0	46.0	68.4
		OUTPUT TORQUE Nm	387.1	603.8	1006.9	1695.0	2505.9	3850.6	6573.0	6710.5	9768.4	14523.7
50	30	INPUT POWER kW	1.5	2.4	4.0	7.0	10.4	15.3	24.3	25.2	40.0	56.0
		OUTPUT TORQUE Nm	338.4	611.2	1005.9	1719.9	2582.4	3993.8	6498.0	6417.6	10367.4	14864.4
60	25	INPUT POWER kW	1.3	2.1	3.4	6.0	8.8	13.0	20.0	22.0	33.3	49.3
		OUTPUT TORQUE Nm	347.2	591.9	937.0	1741.9	2554.8	3724.5	5997.3	6639.1	9983.0	15768.0
70	21.4	INPUT POWER kW	1.0	2.0	3.0	5.0	6.8	10.2	17.1	19.0	29.0	41.4
		OUTPUT TORQUE Nm	324.9	660.4	937.2	1561.9	2215.3	3403.8	6181.2	6613.6	10156.3	15044.6

RATINGS AT INPUT SPEED 1000 R.P.M.

GEAR RATIO	OUTPUT SPEED R.P.M.	CAPACITY	SIZE OF UNIT									
			3	4	5	6	7	8	9	10	12	14
5	200	INPUT POWER kW	5.0	10.0	18.0	26.0	37.2	53.2	58.0	90.0	137.0	201.0
		OUTPUT TORQUE Nm	214.8	453.6	829.4	1179.4	1669.8	2445.8	2620.8	4125.6	6154.2	8758.6
7.5	133	INPUT POWER kW	4.2	7.2	14.0	20.0	30.0	43.0	49.0	65.2	99.0	137.0
		OUTPUT TORQUE Nm	270.4	488.2	944.9	1349.9	2024.9	2948.7	3335.0	4434.8	6625.3	8864.0
10	100	INPUT POWER kW	4.0	6.2	12.0	18.0	25.0	35.0	44.0	46.0	83.0	121.0
		OUTPUT TORQUE Nm	340.0	554.2	1065.8	1615.8	2196.5	3175.4	3991.8	4041.6	7386.5	10204.7
15	66.7	INPUT POWER kW	3.1	5.2	7.4	13.2	19.4	27.0	34.0	40.5	61.2	112.5
		OUTPUT TORQUE Nm	387.0	685.0	980.0	1757.7	2550.2	3595.2	4526.6	5276.9	7994.6	14064.6
20	50	INPUT POWER kW	2.2	5.0	7.0	10.4	14.0	22.0	28.0	38.0	56.0	92.0
		OUTPUT TORQUE Nm	376.5	852.6	1169.8	1748.0	2299.7	3529.6	4973.6	6459.6	9542.9	14997.8
25	40	INPUT POWER kW	2.0	4.0	6.0	8.2	12.5	19.0	24.3	30.0	48.0	72.0
		OUTPUT TORQUE Nm	405.8	821.3	1216.9	1675.4	2562.5	3991.9	5105.7	6159.7	10075.0	14329.4
30	33.4	INPUT POWER kW	1.6	3.4	5.0	7.2	11.4	17.0	21.0	27.0	43.2	65.4
		OUTPUT TORQUE Nm	375.1	807.0	1219.7	1749.9	2734.2	4131.6	5179.4	6659.2	10695.4	15462.6
40	25	INPUT POWER kW	1.5	3.0	4.0	6.2	9.0	13.1	18.0	23.4	38.0	54.2
		OUTPUT TORQUE Nm	459.6	898.1	1237.7	1907.0	2819.1	4087.8	5775.3	7598.0	12106.4	17057.7
50	20	INPUT POWER kW	1.2	2.1	3.4	5.3	8.0	12.0	14.0	19.0	32.4	44.1
		OUTPUT TORQUE Nm	398.8	735.0	1235.4	1941.4	2941.4	4584.0	5414.8	7530.2	12139.8	17352.5
60	16.7	INPUT POWER kW	1.0	2.0	3.0	4.3	7.0	10.0	12.0	16.0	27.0	35.1
		OUTPUT TORQUE Nm	392.0	846.3	1235.3	1803.4	2922.2	4288.9	5489.8	7319.8	11963.3	16740.0
70	14.3	INPUT POWER kW	0.9	1.7	2.5	4.0	5.5	8.0	9.1	13.1	29.0	31.0
		OUTPUT TORQUE Nm	389.0	784.7	1170.6	1816.5	2654.2	3789.5	5365.1	6536.4	10156.3	16247.5

-The Ratings are based on service factor of 1, continuously transmitted for 12 hours/day with normal overload of 100% momentarily for 15 seconds, 40% for 30 minutes,25% for 2 hours.
-Output torque per Shaft in Nm.

FSUO – Dimensions

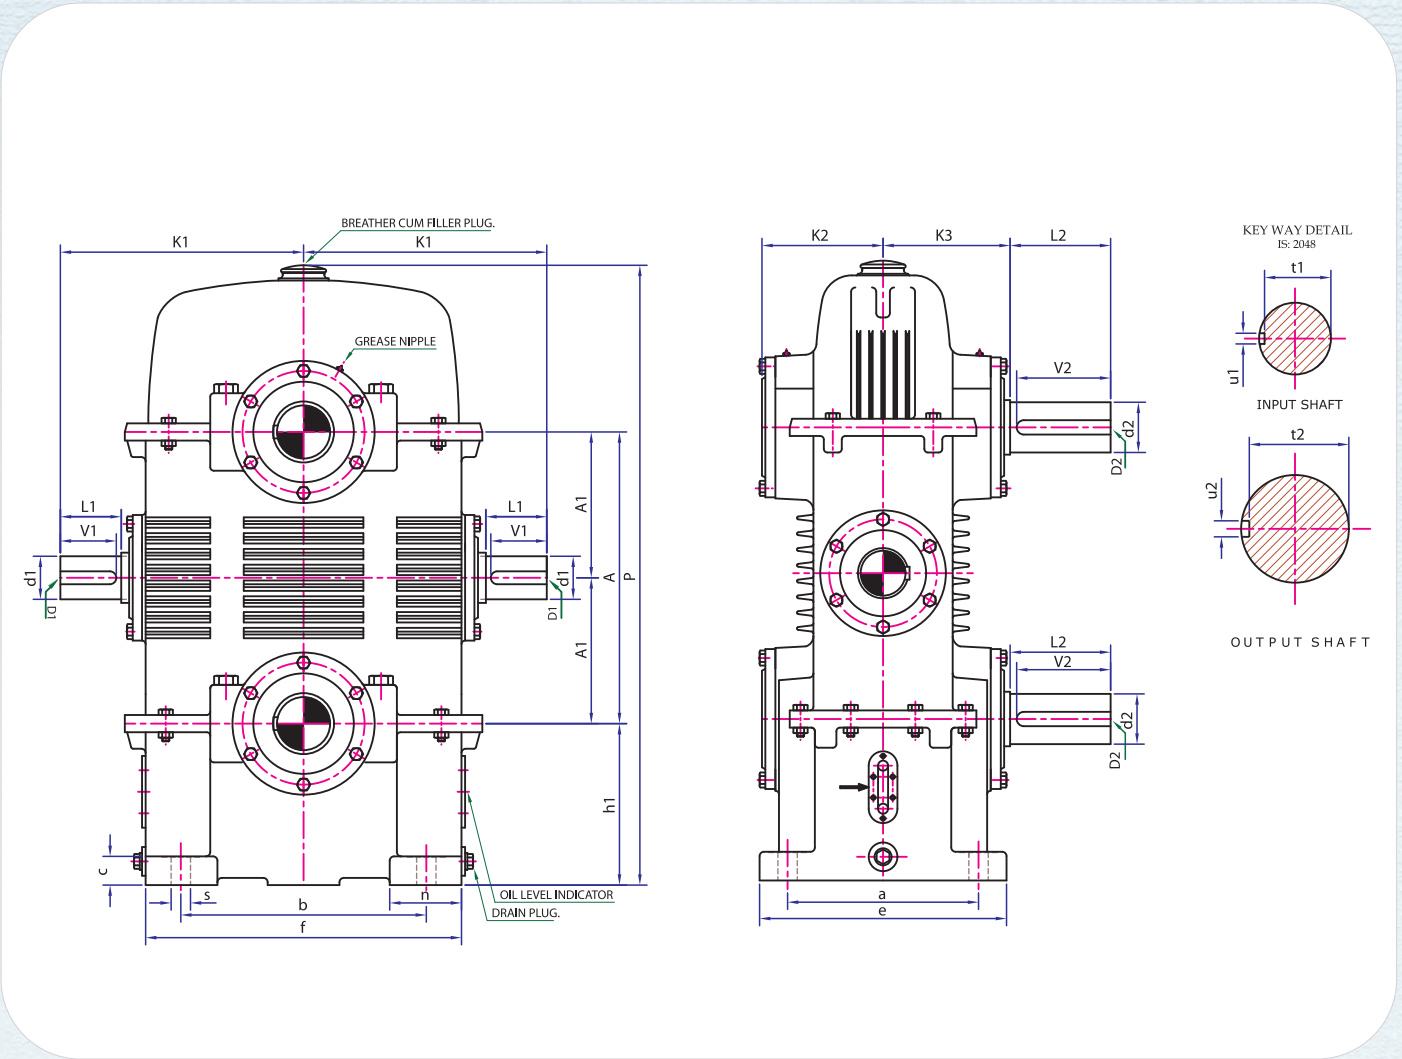

SIZE	MOUNTING DIMENSIONS							CLEARANCE DIMENSIONS							SHAFT END DETAILS											
	a	b	c	e	f	n	s	h1	A1	A	K1	K2	K3	P	d1	L1	d2	L2	V1	V2	D1	t1	u1	D2	t2	u2
3 FSUO	182	140	22	222	184	50	14	90	76.2	152.4	168	107	111	370	25	57	38	75	54	72	M8	21	8	M12	33	10
4 FSUO	204	216	32	254	270	60	23	125	101.6	203.2	229	124	127	470	32	64	45	88	60	85	M12	27	10	M16	39.5	14
5 FSUO	230	250	32	280	320	60	23	150	127	254	260	134	137	570	35	70	50	95	67	92	M12	30	10	M16	44.5	14
6 FSUO	240	266	32	305	350	80	23	170	152.4	304.8	279	156	160	660	38	76	58	114	73	111	M12	33	10	M20	52	16
7 FSUO	258	308	36	320	400	90	27	190	177.8	355.6	311	158	162	760	40	82	65	130	79	127	M16	35	12	M20	58	18
8 FSUO	266	342	40	344	440	100	27	225	203.2	406.4	342	169	172	865	45	88	70	140	85	137	M16	39.5	14	M20	62.5	20
9 FSUO	282	390	40	344	490	100	27	255	228.6	457.2	375	177	180	980	50	95	75	125	92	122	M16	44.5	14	M20	67.5	20
10 FSUO	350	470	50	430	580	110	33	285	254	508	450	198	202	1095	60	115	80	150	110	147	M20	53	18	M20	71	22
12 FSUO	440	530	55	540	630	125	33	330	304.8	609.6	485	208	216	1295	60	125	85	165	120	160	M20	53	18	M20	76	22
14 FSUO	470	620	65	560	770	150	33	395	355.6	711.2	590	258	280	1505	80	140	110	200	135	195	M20	71	22	M24	100	28

- Key & keyways as per IS 2048, Shaft limits: up to Ø58 – k6 and above Ø58 – m6.
- 17 FSUO Rating & Dimensions , please contact ELECON.
- Unless otherwise specified housing of cast iron. Welded steel on request.

RECOMMENDED LUBRICANTS

1.Mineral Oil

BRAND	GRADE
International Brands	
British Petroleum	CS 320 or GR-XP320
Castrol	Alpha Zn 320 or Sp 320 or Tribol 110/320 IGQA
Caltex	Meropa 320
Esso Petroleum	Teresso 320 or Spartan 320
Fuchs	Renolin CKC 320
Mobil	Mobil DTE Oil AA or Mobilgear 632
Motul	SUPRACO MPL 320
Shell	Vitera Oil 320 or Omela 320
Indian Brands	
Bharat Petroleum	Cabol 320
Fuchs	Renolin CKC 320
Castrol	Alpha Zn 320 or Alpha sp 320 or Tribol 1100/320 TGQA
Gulf	Gulf harmony 320 or Gulf EP 320
Hindustan Petroleum	Enklo 320 or Parthan EP 320
Indian Oil	Servomesh SP 320 or Servosystem 320
Veedol	Avalon 320

2.Recommended Grease : For low speed operations

BRAND	GRADE
Castrol	EPL 2
Indian Oil	Servogem EP 2

Shipping specification & Oil capacity.

Size of Unit	3	4	5	6	7	8	9	10	12	14
Average net weight (kg)	68	146	220	280	380	400	650	970	1325	1895
Average net gross weight (kg)	110	180	300	350	970	480	730	1130	1610	2250
Approximate oil capacity (liters)	3.5	4.5	5.5	7.5	8.5	12.5	17.5	22.5	27.5	38.5

First filling of oil, not supplied unless requested.

As improvement in designing are continuously being made, the details and dimensions are subject to alteration without notice.

:Marketing & Servicing Company:



EMTICI ENGINEERING LIMITED

Registered Office : Anand - Sojitra Road, Vallabh Vidyanagar 388120. Gujarat, India, Phones: +91 (02692) 230168, 231125 Fax: (02692) 236508 Website: www.emtici.co.in

:BRANCHES:

AHMEDABAD :
Phone : +91 792 2640 6683,
+91 792 640 6686
Fax : +91 792 2640 1363
E-Mail : sales@ahdmtici.elecon.com

ASANSOL :
Phone : +91 341 230 5901,
+91 341 231 1726
Fax : +91 341 230 2038
E-Mail : salesasn@asnemtici.elecon.com

BANGALORE :
Phone : +91 802 225 0082,
+91 802 228 2925
Fax : +91 802 228 1834
E-Mail : salesbgl@bglemtici.elecon.com

BILASPUR :
Phone : +91 775 247 723,
+91 775 247 625
Fax : +91 775 247720
E-Mail : salesbil@bilemtici.elecon.com

CHENNAI :
Phone : +91 442 434 9497,
+91 442 434 9237
Fax : +91 442 434 9643
E-Mail : salesmad@mademtici.elecon.com

DHANBAD :
Phone : +91 326 230 6283,
+91 326 230 2320
Fax : +91 326 230 2320
E-Mail : salesdhn@dhnmmtici.elecon.com

INDORE :
Phone : +91 731 255 8077,
Telefax : +91 731 257 6100

JAMSHEDPUR :
Phone : +91 657 236 1837
Fax : +91 657 236 2885
E-Mail : sales_jns@jnpemtici.elecon.com

KOLKATA :
Phone : +91 332 476 1861,
+91 332 476 0876
Fax : +91 332 476 1831
E-Mail : salescal@calemtici.elecon.com

MADURAI :
Phone : +91 454 929 3488
Fax : +91 454 928 1025

NAGPUR :
Phone : +91 712 664 2600,
+91 712 664 2601
Fax : +91 712 664 2622
E-Mail : salesnag@nagemtici.elecon.com

MUMBAI :
Phone : +91 222 282 1315,
+91 222 282 0725
Fax : +91 222 287 0791
E-Mail : salesbom@bomemtici.elecon.com

NEW DELHI :
Phone : +91 11 2341 463,
+ 91 11 2341 3164
Fax : +91 11 237 09 046
E-Mail : salesdel@delemtici.elecon.com

PUNE :
Phone : +91 20 4019 1400
+91 20 4019 1401
Fax : +91 20 4019 1411
E-Mail : salespune@puneemtici.elecon.com

VADODARA :
Phone : +91 265 231 2972,
+91 265 231 2980
Fax : +91 265 231 2972
E-Mail : salesbrd@brdemtici.elecon.com

SECUNDRABAD :
Phone : +91 402 784 4748,
+91 402 784 5250
Fax : +91 402 784 8317
E-Mail : salessec@secemtici.elecon.com

: INTERNATIONAL BRANCHES :

MIDDLE EAST : ELECON MIDDLE EAST FZCO
Phone : +97 146 091 424, +97 146 091 425
Fax : +97 146 091 426 E-Mail : rajen@dubai.elecon.com
milap@dubai.elecon.com, nirav@dubai.elecon.com

SOUTH AFRICA : ELECON AFRICA PTY. LTD.
Cell : +91 269222
E-Mail : jnshah@gear.elecon.com

FAR EAST : ELECON SINGAPORE PTE. LTD.
Phone : +65 622 782 58
Fax : +65 622 789 42
E-Mail : vipul@singapore.elecon.com,
tejas@singapore.elecon.com



Always a step ahead in technology

Manufactured by : **ELECON ENGINEERING CO. LTD.**
Post Box # 6, Vallabh Vidyanagar - 388 120, Gujarat, INDIA
MHE DIVN. : Tel. : +91 269 223 7016, +91 269 223 6521, +91 269 223 6590 Fax : +91 269 223 6457 E-mail : infomhe@elecon.com
GEAR DIVN. : Tel. : +91 269 223 6469, +91 269 223 6513, +91 269 223 6516 Fax : +91 269 223 6427 E-mail : infogear@elecon.com
Website : www.elecon.com